



SM-50 Ice Cube Machine

# SM-50 Ice Cube Machine

Model

□ SM-50A



# Standard Features

- Produces up to 53 lbs. (24 kgs) of ice in 24 hours with storage capacity of 25 lbs. (11 kgs)
- Individual cubes with unique octagon shape.
- Designed to be installed into standard cabinet dimensions 15.00" (38.00 cm) or stand alone with stainless steel top and sides standard.
- Unit ships with hinge on right, easily changed to left during installation.
- Easily accessible control panel with the following functionality:
  - Automatic ice making mode.
  - · Patented cleaning and sanitizing.
  - Delay start option.
  - Filter replacement warning light.
- Water filter system integrated inside machine with depth filtration and scale inhibitor.
- Lighted bin (LED light) with large opening for easy access.
- Optional drain pump easily integrates inside the machine during installation.

### Warranty

- 3-year commercial parts and labor warranty on entire machine.
- 1-year residential ice machine limited warranty.

Cube Size



**Standard** 1¾" x 1¾" (33 x 34 mm)




2110 South 26th Street PO Box 1720 Manitowoc, WI 54221-1720 USA Tel: 1.920.682.0161 Fax: 1.920.683.7589 www.manitowocice.com







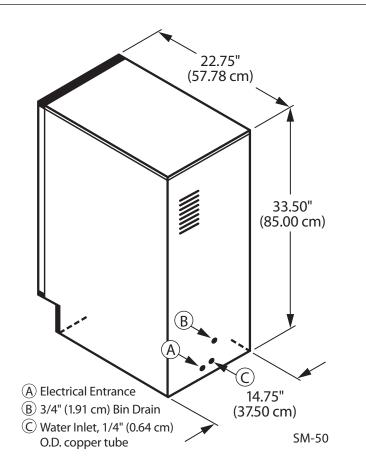

Installation Note - There is no minimum clearance reauired, desianed to be integrated into cabinet opening 15.00" (38.00 cm) wide.

## Ice Machine Flectric

115/60/1 Factory pre-wired with a 6' (180 cm) power cord and NEMA 5-15P-plug configuration. Total Amps: 4.1 Max. fuse size: 15 amps HACR-type circuit breakers can be used in place of fuses.

## **Specifications**

#### **BTU Per Hour:**

1,145 (average) 2,300 (peak)

#### **Compressor:**

Nominal rating: 1/6 HP

#### **Operating Limits:**

- Ambient Temperature Range: 50° to 110°F (10° to 43°C)
- Water Temperature Range: 35° to 90°F (2° to 32°C)
- Water Pressure Ice Maker Water In: Min. 20 psi (138 kPA) Max. 80 psi (551 kPA)

#### Legs:

Levelers standard 0" to 1" (0-2.5 cm) adjustability.

Optional legs (K-00345) 4.25"-6.00" (10.80-15.24 cm).

#### Insulation:

Insulation foamed-in-place with CFC-FREE foam.

	Ice Shape	Ice production 24 hours				
Model		70° Air/50° F Water 21° Air/10° C Water		90° Air/70° F Water 32° Air/21° C Water		Power kWh/100 lbs @90°/70°F
		lbs.	kgs	lbs.	kgs	
SM-50A	Standard	53	24	44 lbs.	20 kgs	7.0
			Water usage/	100 lbs./45.4 kg	s of Ice	
			Potable Wate	r: 43 gallons, 16	3 liters	

"A" following model number indicates "Air" cooled condensing unit.

#### Air Flow Front View



#### Front Access Control Panel

Machine automatically keeps the bin full. Choose delay start for optimal quietness. Machine automatically restarts.

#### Water Filter



Auto-bypass for easy change out. Replacement water filter is AR-2800 (K-00374 12 pk).

necessitate change of specifications without notice

 $3404E \ @2010$  Manitowoc 1/10 Continuing product impre

2110 South 26th Street PO Box 1720 Manitowoc, WI 54221-1720 USA

Tel: 1.920.682.0161 Fax: 1.920.683.7589 www.manitowocice.com



0

