



Large Bin Cart System Ice Storage

Models | LBCS1360





Cart Measurements:

- 36" H x 22.5 " W x 33.5" L
- 91.4 H x 57.2 W x 85.1 cm

Tote Measurements:

- 13.5" H (grab lip of 3.5") x 8.35" W x 9" L
- 34.3 H (grab lip of 8.9) x 21.2 W x 22.9 L cm



LBCS1360 includes: adjustable flanged legs, 1.5-3.5"(38.1-88.9mm) ice machine adapter with filler panels to fit most single ice machine configurations , 2- ice carts with spacer and 6 convenient ice totes, 2- external storage hooks to hang included 48" paddle and NSF ergonomic ice scoop with thumb and knuckle guard.

Standard Features

- •Ice Storage volume verified by AHRI (American Air Conditioning, Heating and Refrigeration Institute)
- •First ice in / first ice out method insures fresher tasting ice.
- •Welded corrosive resistant 304 stainless steel front and side exterior
- •Roto-molded seamless rust free polyethylene liner with 2—1" ID drains
- •Bin walls foamed with non-CFS polyurethane insulation 1.5 inches thick
- •Stainless steel guillotines dispense ice safely and sanitary into the insulated polyethylene ice carts
- •Ice capacity for carts: ~207 lb of ice without totes. The spacer elevates the 6-16 lb totes for easy handling and transport . Foot operated drain allows water to drain out of the cart and into the rear drain pan then into the floor drain when cart is parked in the bay.

Warranty

- Limited 5 year parts and labor on bin and carts
- Limited lifetime warrant on polyethylene liner

Optional Accessories


- K00499 Replacement NSF 48" Paddle
- K00503 NSF 60" Paddle
- K00500 NSF 37" Shovel
- K00501 Replacement Set of 6 NSF Totes
- K00602 Replacement NSF Ice Cart
- K00504 Replacement Storage Hook
- K00463 NSF 85 oz Metal Scoop
- K00482 Hanger (Required for K00461)
- K00461 External Scoop Holder

Model	Application Capacity lbs (kg)	AHRI Volume Cu. ft (Cu. cm)	Width in (cm)	Depth in (cm)	Height in (cm)	Shipping Weight Ibs (kg)	
LBCS1360	772 (350.2)	25 (.71)	60 (152.4)	36 (91.4)	71 (180.3)	840 (381)	
K00512—Sleeve	386 (175.1)	13 (.37)	60 (152.4)	36 (91.4)	12 (30.5)	395 (179.2)	

Application capacity measured by 90% of the total volume in cu. ft x33 lbs./ft3 Guillotine handle adds 4.5 inches in depth once installed . Can be slid out for easy door entry K00512 sleeve adds 386 lbs of capacity and 12" in height to the bin. (sold separately)








Tel: 1.920.682.0161 Fax: 1.920.683.7589





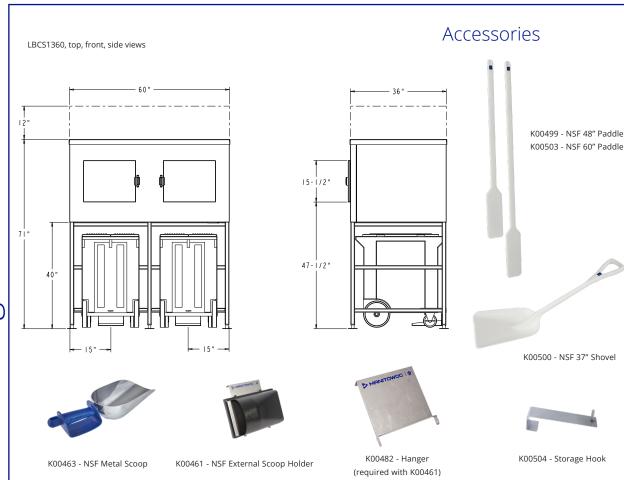

Ice Deflector Chart (Required- not included with bins)

Manitowoc Cubers	Ice Deflector Kit Numbers				
IT0450 , iT0500, IF0500N, IF0600N, IT0750, IF0900, IT0900, IT1200	K00347				
IT1500, IT1900	K0034900				
IF1400C, IF1800C	K00382 (for single ice machine) K00383 (for side-by-side ice machines)				
S3000	K00391				

^{*}Flaker and nugget machines do not require a deflector

Bin Adapter Chart

Model	Ice Makers on Bin	Bin Width	IT0500, IF0500N	IF0600N, IT0750	IF0900N, IT0900, IT1200	IF0600C, IF0900C, IT1200C	IF1400C, IF1800C	RNF1100, RFF1300, RFF2200C, RNF2000C	IT0420, IT0620	RNF0320, RNF0620, RNF1020C, RFF0320, RFF0620, RFF1220	IT1500, IT1900	IBF0620C, IBF0820C, IBT1020C	ST3000W, SF3000C
Model Widt	Width 30"		30"	30"	30"	30"	30"	30"	22"	22"	48"	22"	48"
LBCS1360	1	60"	KLB613048 (included with bin)						N.A	KLB614800			
LBC31300	2	60"	KLB613030						KLB612222	N.A	KLB612214	N.A.	

^{*}For side by side applications, use water-cooled, remote or ice machines with top air discharge option.

Welbilt reserves the right to make changes to the design or specifications without prior notice.

